

Note: Cable assembly must be ROHS compliant.

PIN ASSIGNMENT:

8P8C M:

6P6C M:


8	RA+	6
7	RA-	3
4	GND	2

For reference:


ST-4 6P6C Pinout

Pin 1 = NC
 Pin 2 = GND
 Pin 3 = RA-
 Pin 4 = DEC-
 Pin 5 = DEC+
 Pin 6 = RA+

For 0.5x Siderreal Rate join 8P8C pins 4 & 7
 For 1.5x Siderreal Rate join 8P8C pins 4 & 8

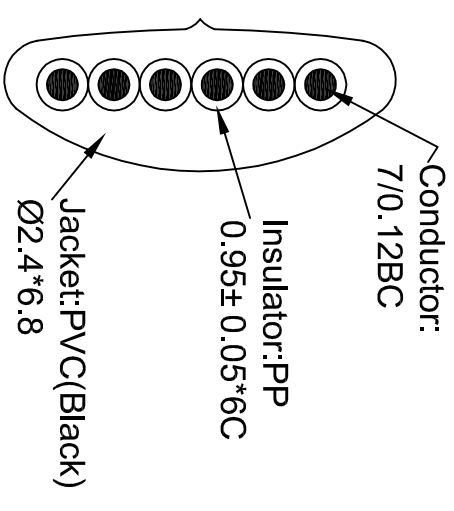

8																			
7																			
6																			
5																			
4																			
3	RJ12 Male Plug (ST-4 compatible)	1	PCS	UP TO 5	±0.2	DRAW:	徐翩翩	TITLE	RJ45 Male Plug to RJ12 Male Plug 3M										
2	RJ45 Male Plug	1	PCS	ABOVE 5--30	±0.3	CHECKED:		PART NO.											
1	CABLE: Telephone Flat cable(7/0.12BC)*6C OD2.4*6.8 28AWG Color:Black Flat L=3m	1	PCS	ABOVE 30--50	±0.4	APPROVED:		DRAW NO.											
NO				ABOVE 50	±0.5	DATE	2010.06.09	SCALE	1:1										
	Descriptron	Q'TY	Unit	ANGLE	±3°			UNIT	mm										



TOLERANCE OTHERWISE UNLESS SPECIFIED

DRAW:

徐翩翩

TITLE RJ45 Male Plug to RJ12 Male Plug 3M

CHECKED:

PART NO.

APPROVED:

DRAW NO.

DATE

2010.06.09

SCALE

1:1

UNIT

mm